


Rohloff Adjustment Tips

-If your Rohloff does not have all 14 gears (13 clicks) Please follow these steps.


*As a note you do not need to adjust the barrel adjusters as you would on a regular derailleur system. If you have already played with the barrel adjusters you should return them to (cable loose) position by screwing them in clockwise (as pictured below). Later they can be adjusted to affect the feel at the shifter.

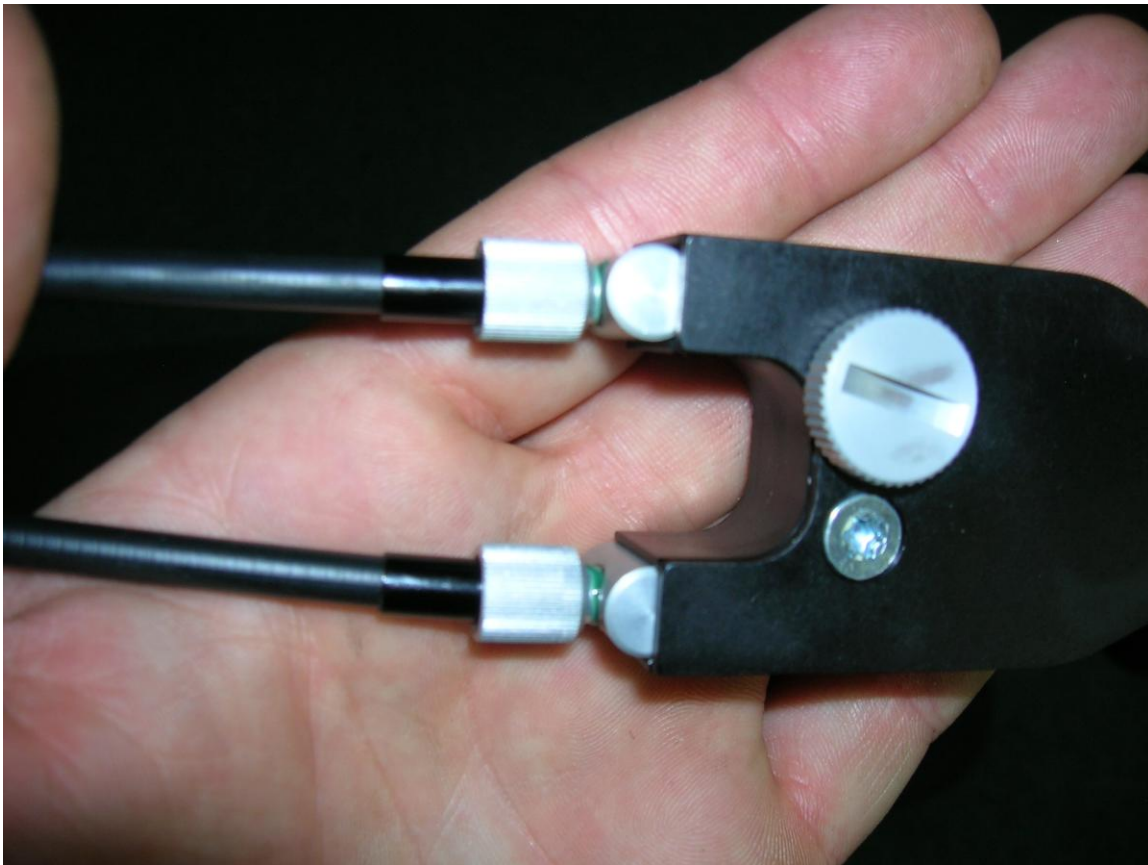

1. Remove Rohloff gearbox from Rohloff hub. By turning the silver screw counterclockwise and pulling away from the bike.



2. Click the 8mm hex on the Rohloff hub all the way counter clockwise.

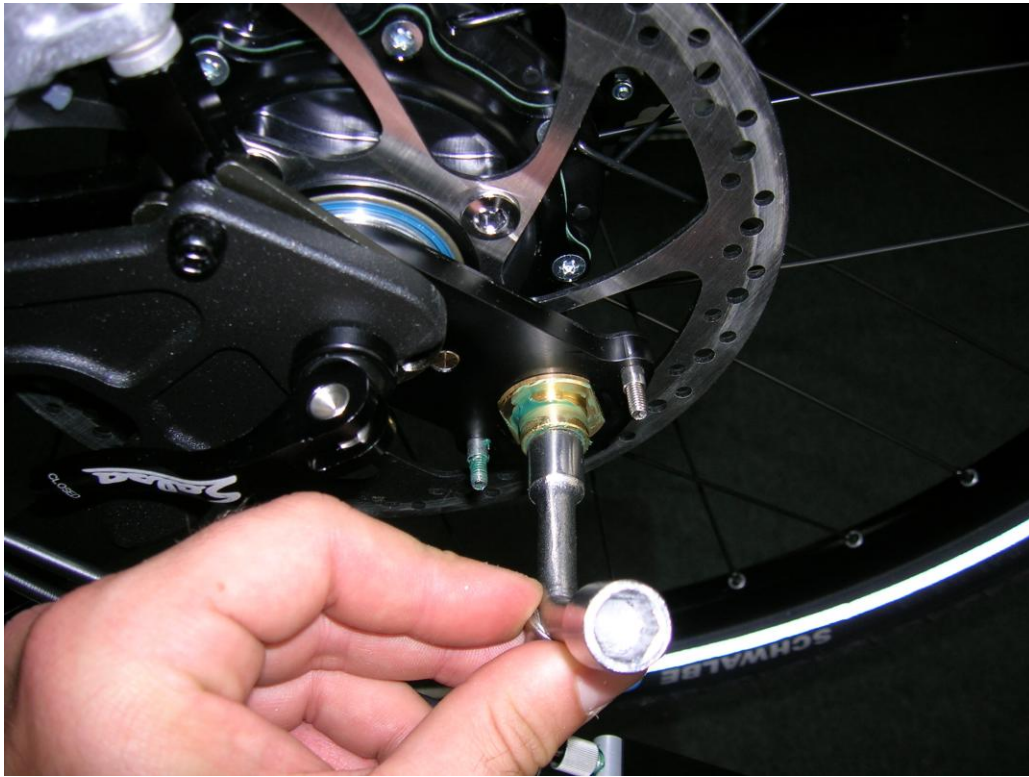

3. Now on the handlebar rotate the shifter till it is oriented on the 14.



4. You will now be able to put the Rohloff gearbox back on to the Rohloff (you may need to slightly rotate the shifter at the handlebar to align the gear box and the 8mm hex head). (This is the tricky part and requires small subtle movements of the shifter to ensure that you do not end up with less than 14 gears). Once the gearbox is on, turn the silver screw clockwise until tight.



5. Check to make sure that you have all 13 clicks, by shifting through the gears. If you do not have all 13 clicks repeat steps 1 – 4.
6. It is now possible to adjust the barrel adjusters to affect the feel of the shifter at the handlebar if desired. The further counterclockwise you move the barrel adjuster the more cable tension there will be. More cable tension increases the stiffness at the shifter.